

RIKAFLEX HOSES





RIKAFLEX HOSE

150 PSI

TECHNICAL SPECIFICATIONS

TUBE

The rubber hose used in the lining shall be a copolymer of butadiene and acrylonitrile (NBR)

REINFORCEMENT

The rubber used shall be NBR and reinforcement consisting of either braided synthetic fibre yarn or spiral plies of synthetic fiber cord

COVER

The rubber used in cover shall be a blend or a co polymer of butadiene , acrylonitrile and polyvinyl chloride

DESIGN TEMPERATURE

Maximum ambient temperature of 55°C and minimum of -26°C

FACTOR OF SAFETY 4 : 1

BRANDING RIKA Flex

STANDARD LENGTH Rolls of 10m, 20m, 40m, 230 m

STANDARDS/APPROVAL MIL -H-22240F




APPLICATION

Suitable for petroleum based fuels and water service discharge rubber hose for marine applications.

Code	Internal Diameter		TYPE	Wall Thickness	Working Pressure	Burst Pressure
	inch	mm		inch	psi	psi
RF25C	2.5	63.5	Type C	0.312 ± 0.047	150	600
RF4A	4	101.6	Type A	0.328 ± 0.047	150	600
RF6A	6	152.4	Type A	0.422 ± 0.047	150	600
RF6B	6	152.4	Type B	0.475 ± 0.047	150	600
RF7A	7	177.8	Type A	$0.438+0.047-0.024$	150	600



RIKAFLEX HOSE

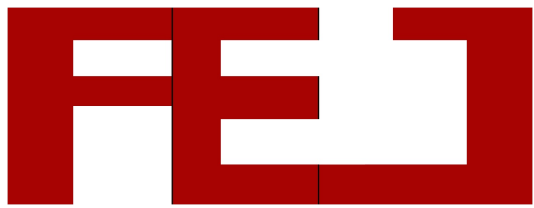

FUJIWARA ENGINEERING JAPAN



ENGINEERING INDIA
PRIVATE LIMITED

フジワラエンジニアリングジャパン株式会社

FUJIWARA ENGINEERING JAPAN CO., LTD.

An ISO-Certified Company

EMS 14001:2015 QMS 9001:2015 ISO 45001:2018

FUJIWARA ENGINEERING JAPAN CO., LTD.

DO-YAMAMOTO ENGINEERING INDIA PVT. LTD.

HEAD OFFICE: SHREE TOWERS, 3RD FLOOR PLOT NO J540/5
BHOSARI, MAHARASTRA INDUSTRIAL DEVELOPMENT
CORPORATION, PUNE, MAHARASTRA, 411026

BRANCH OFFICE: OM CHAMBERS, 648/A. 4TH FLOOR,
BINNAMANGALA 1ST STAGE, INDIRANAGAR (BANGALORE),
BANGALORE, BANGALORE NORTH, KARNATAKA, INDIA, 560038

TEL - (+91) - 93199-98853 • TEL - (+91) - 99465-18163

EMAIL - abhishekf_eng-ind@do-yamamoto.com
paul_eng-ind@do-yamamoto.com
nikhil_eng-ind@do-yamamoto.com

QATAR Doha
USA Delaware
UAE

WWW.DO-YAMAMOTO.COM

