


RIG HOSE 2” WITH HAMMER UNION

FIG. 1502 INTEGRAL:



- ONE-PIECE NO-SKIVE VERSIONS
- INTEGRAL FITTINGS, NO NEED OF ADAPTER
- NO WELDED PARTS, SOLID ONE-PIECE
- DIRECT, COMPACT AND SMART SOLUTION
- LONG LENGTH UP TO 61 MTR. (200 Ft.) HOSES, TO REDUCE UNION
- THE LESS PARTS INVOLVED, THE SAFEST RESULT, THE HIGHEST PERFORMANCE
- MANUFACTURED BY BAR DRILLING FROM THE HIGHEST QUALITY RAW MATERIAL
- DESIGNED TO ALLOW THE MOST COMPACT AND DIRECT UNION
- CONFORMITY TO API REQUIREMENTS

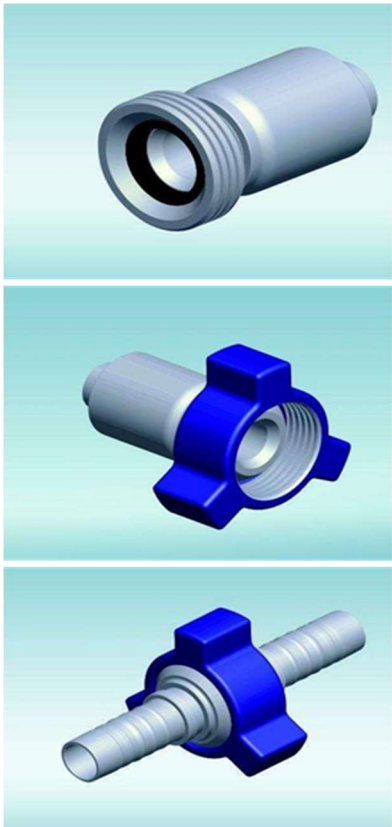

Hose Model	Dash	Internal Diameter		Working Pressure		Burst Pressure		S Safety Coefficient	MBR (mm)	LengthMax (mtr.)
		(inch)	(mm)	(bar)	(psi)	(bar)	(psi)			
Rig Hose 5K	32	2	51	345	5000	862	12500	2.5	914.4	61
SAE R13	32	2	51	345	5000	1379	20000	4	550	61
SAE R15	32	2	51	414	6000	1655	24000	4	635	61
Rig Hose 10K	32	2	51	690	10000	1552	22500	2.25	1219.2	61
Cement Hose 5K	32	2	51	345	5000	862	12500	2.5	914.4	61
Cement Hose 10K	32	2	51	690	10000	1552	22500	2.25	1219.2	61