


Suction & Delivery Abrasive Material Hose

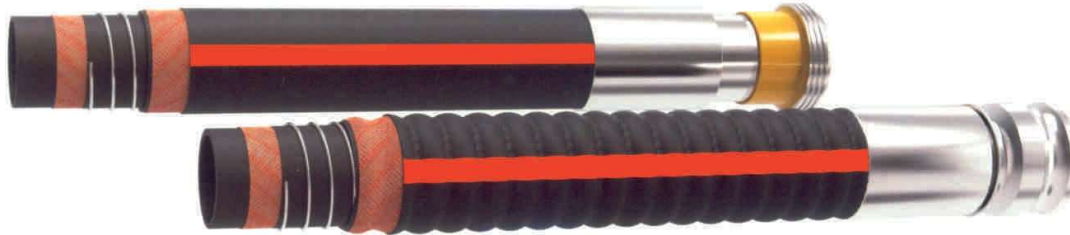

Application: Hose designed to convey barite, bentonite, Cement and other abrasive materials from ship to oil rigs to consolidate the oil well.

Tensile breaking load: 7000 kgf.

Temperature: From -13°F to +158°F.

Construction:

Tube: Black, smooth, abrasion resistant NR/SBR rubber. Reinforcement: high strength synthetic cord, steel helix wire, and antistatic copper wire.

Cover: black, smooth (wrapped finish), weathering, ozone, and sea-water resistant.

Branding: continuous red stripe "Roughneck Offshore (Logo) - PL ABRASIVE SD 20 - Embossed marking "Roughneck Offshore - PL ABRASIVE SD 20 - I.D. - W.P. - TEMP."

Inside diameter		Outside diameter		Working pressure		Burst pressure		Approx. Weight nominal		Bending radius		Vacuum	Length max	
mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
102	4	123	4.85	20	300	80	1200	6.15	4.13	550	21.7	0.9	120	400
127	5	151.5	5.97	20	300	80	1200	8.01	5.38	730	28.8	0.9	60	200

Office Address: -
3rd Floor, Shree Towers, Gawali Dev Road, Bhosari MIDC,
Pune-411026

Contact: +91 93199-98853

Email : abhishekf_eng-ind@do-yamamoto.com /
nikhil_eng-ind@do-yamamoto.com / paul_eng-ind@do-yamamoto.com
Website :www.do-yamamoto.com